

Bucket elevator

For vertical transport of bulk goods in the wood and power plant area.

Constructional features

- compact, robust build
- with or without injector screw
- centring drums
- belt or chain bucket elevators


Areas of use

- vertical transport
- large conveyor outputs
- low energy demand
- also suitable for temperature-stressed bulk goods

Customer benefits

- small space demand
- large conveyor outputs and heights
- low energy demand
- low maintenance demand
- dust-free transport

Technical data	
• Conveyor output	40 - 400 m³/h
• Drive output	5.5 - 55 kW
• Dimensions	
Width supported on both sides	400 - 1,600 mm
Length	10,000 - 35,000 mm
• Monitoring	Inclination, rotary monitor
• Wear protection	Bucket with hard metal reinforcement
• Design	CE declaration of conformity ATEX: Standard, no Ex-suitability Optional: Inside: Zone 22 and Outside: no zone (Ex II 3/-D)

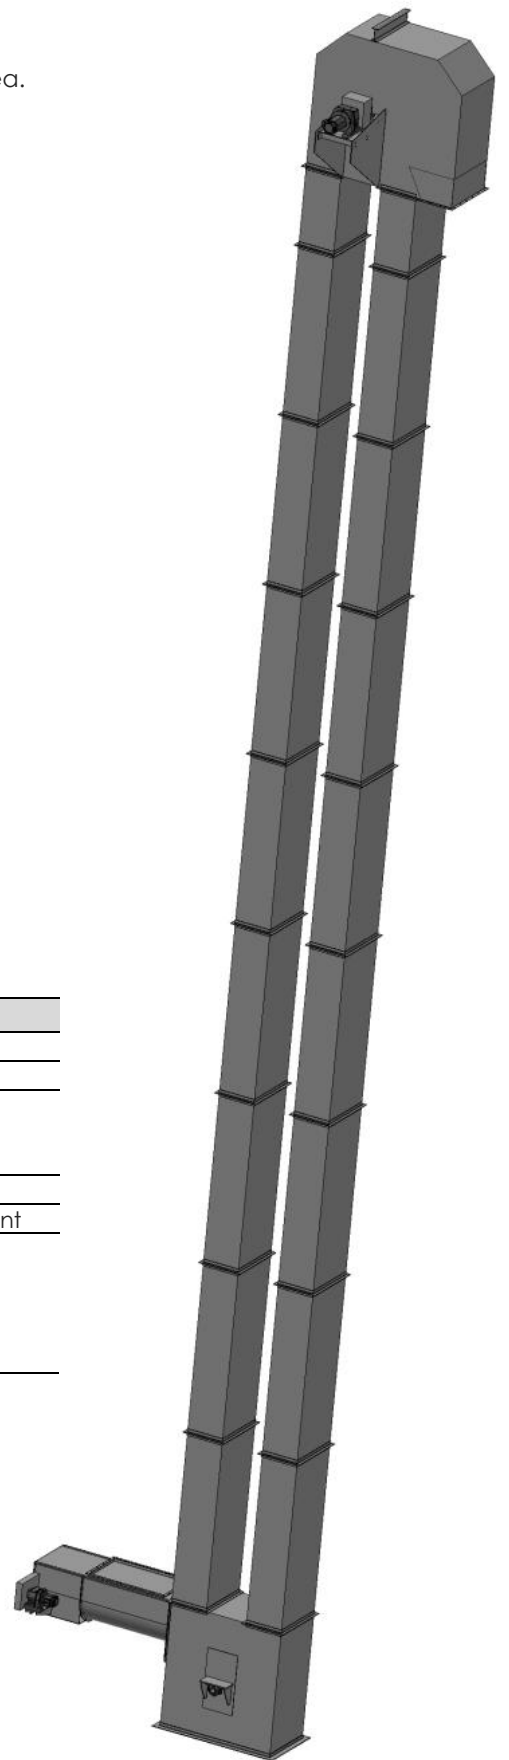

Bucket elevator with injector screw